

TADANO CARGO CRANE

MODEL : **TM-ZE263HS**

CRANE SPECIFICATIONS

CRANE CAPACITY 2,600 kg at 1.6 m (4-part lines)

BOOM Three-sectioned, fully hydraulic telescoping boom of pentagonal box construction

Retracted length ----- 2.85 m

Extended length ----- 6.6 m

Extending speed ----- 3.75 m / 10 s

Elevation ----- Elevated by a double-acting hydraulic cylinder

Elevating speed ----- 1° to 76° / 6 s

Boom point ----- 2 sheaves

WINCH Hydraulic motor driven Spur gear speed reduction, provided with mechanical brake

Single line pull ----- 6.37 kN {650 kgf}

Single line speed ----- 68 m/min (at 4th layer)

Wire rope

Diameter x length ----- 8 mm x 45 m

Breaking strength ----- 43.1 kN {4.39 tf}

Construction ----- 7 x 7 + 6 x WS(26)

Hook block ----- 2 sheaves

HOOK STOWING DEVICE Mechanically stowed beneath boom top portion

RATED LIFTING CAPACITIES IN KILOGRAMS

Crane Strength Rated Capacities

Load Radius	2.85 m / 4.74 m Boom		Load Radius	6.6 m Boom
	Extension width of outriggers			Extension width of outriggers
	Full	Minimum		Full
1.6 m and below	2,600	1,550	2.8 m and below	1,250
1.8 m	2,200	1,200	3.0 m	1,200
2.0 m	2,000	1,000	3.5 m	1,050
2.5 m	1,600	600	4.0 m	900
3.0 m	1,300	450	4.5 m	770
3.5 m	1,100	350	5.0 m	670
4.0 m	950	300	5.5 m	600
4.54m	850	250	6.0 m	550
			6.4 m	520

- NOTES : 1. Capacities in above tables include slings and similarly used load handling devices, and they must be added to the mass of the load. They don't, however, include the mass of hook block (30kg)
 2. The above numerical values of total rated loads are based on crane strength only. The total rated loads based on stability may lower than those in the above table depending on the loading conditions and the types of the chassis.

Empty Chassis Rated Capacities

Table A

Load Radius	2.85 m / 4.74 m Boom		Load Radius	6.6 m Boom
	Extension width of outriggers			Extension width of outriggers
	Full	Minimum		Full
1.6 m and below	2,600	1,550	2.6 m and below	1,200
1.8 m	2,200	1,200	2.8 m	1,100
2.0 m	2,000	1,000	3.0 m	1,000
2.5 m	1,450	600	3.5 m	750
3.0 m	1,000	450	4.0 m	600
3.5 m	750	350	4.5 m	500
4.0 m	600	300	5.0 m	400
4.54m	500	250	5.5 m	350
			6.0 m	320
			6.4 m	300


Table C

Load Radius	2.85 m / 4.74 m Boom		Load Radius	6.6 m Boom
	Extension width of outriggers			Extension width of outriggers
	Full	Minimum		Full
1.6 m and below	2,600	1,550	2.8 m and below	1,200
1.8 m	2,200	1,200	3.0 m	1,100
2.0 m	2,000	1,000	3.5 m	850
2.5 m	1,500	600	4.0 m	650
3.0 m	1,150	450	4.5 m	550
3.5 m	850	350	5.0 m	450
4.0 m	700	300	5.5 m	400
4.54 m	550	250	6.0 m	350
			6.4 m	320


Table D

Load Radius	2.85 m / 4.74 m Boom		Load Radius	6.6 m Boom
	Extension width of outriggers			Extension width of outriggers
	Full	Minimum		Full
1.6 m and below	2,600	1,550	2.8 m and below	1,250
1.8 m	2,200	1,200	3.0 m	1,200
2.0 m	2,000	1,000	3.5 m	1,050
2.5 m	1,600	600	4.0 m	900
3.0 m	1,300	450	4.5 m	770
3.5 m	1,100	350	5.0 m	670
4.0 m	950	300	5.5 m	600
4.54m	850	250	6.0 m	550
			6.4 m	520

- NOTES :
1. Empty Chassis Rated Capacities in these tables depend on condition that crane is set level on firm level ground.
 2. Capacities in these tables include slings and similarly used load handling devices, and they must be added to the mass of the load. They don't, however, include the mass of hook block (30kg).
 3. For boom lengths not shown, use the rated lifting capacity of next longer boom.
 4. When outriggers are extended to middle extension width, use the rated lifting capacities for outriggers are extended to minimum extension width.
 5. For boom lengths longer than 4.74m, extend outriggers to full extension width.
 6. Empty Chassis Rated Capacities table A , C and D depend on the types of chassis.
 7. Empty Chassis Rated Capacities are shown for over-side areas and over-rear area. These capacities for over-front area may be lowered depending on the types of chassis.

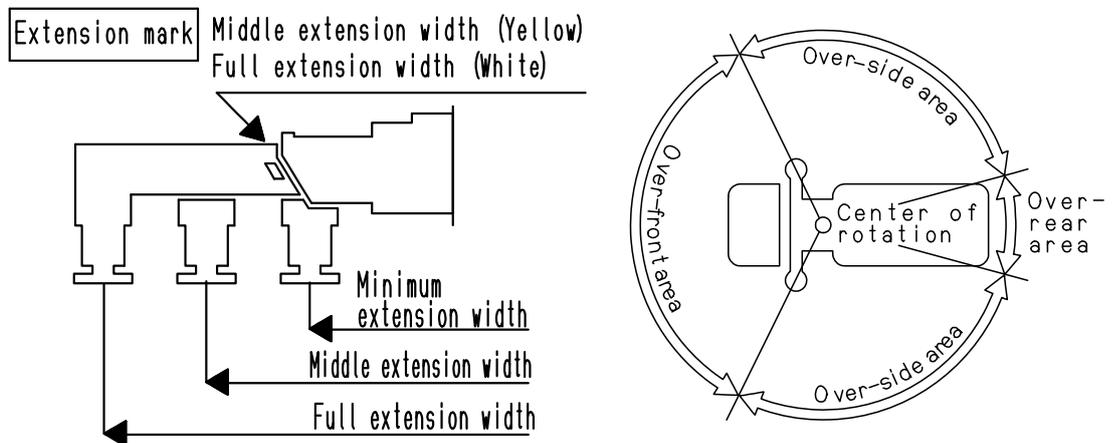


WORKING RANGE

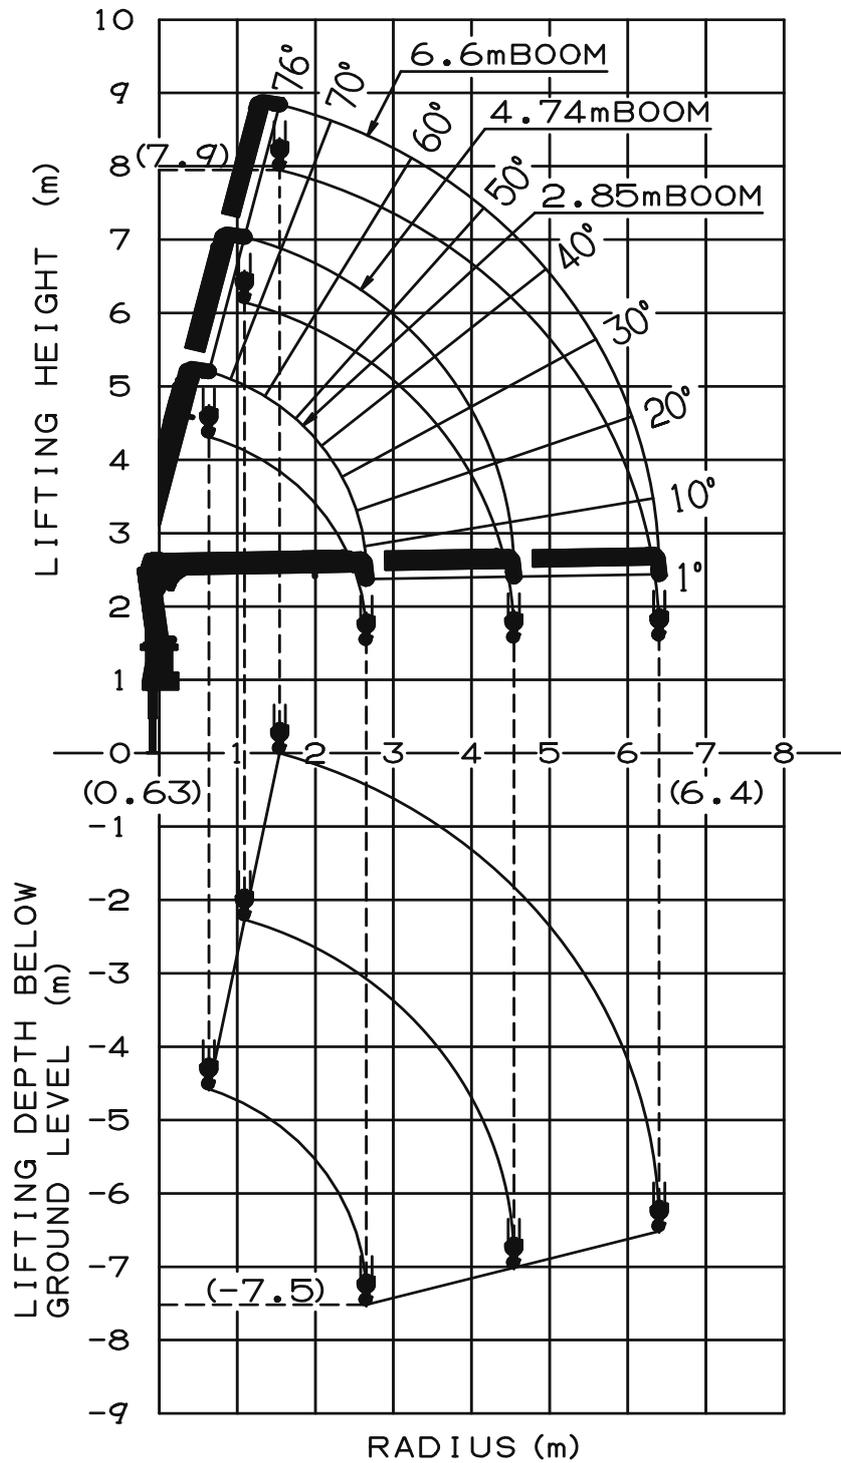

NOTE : The above lifting heights and boom angles are based on a straight (unladen) boom, and allowance should be made for boom deflection obtained under laden conditions.

DIMENSIONS

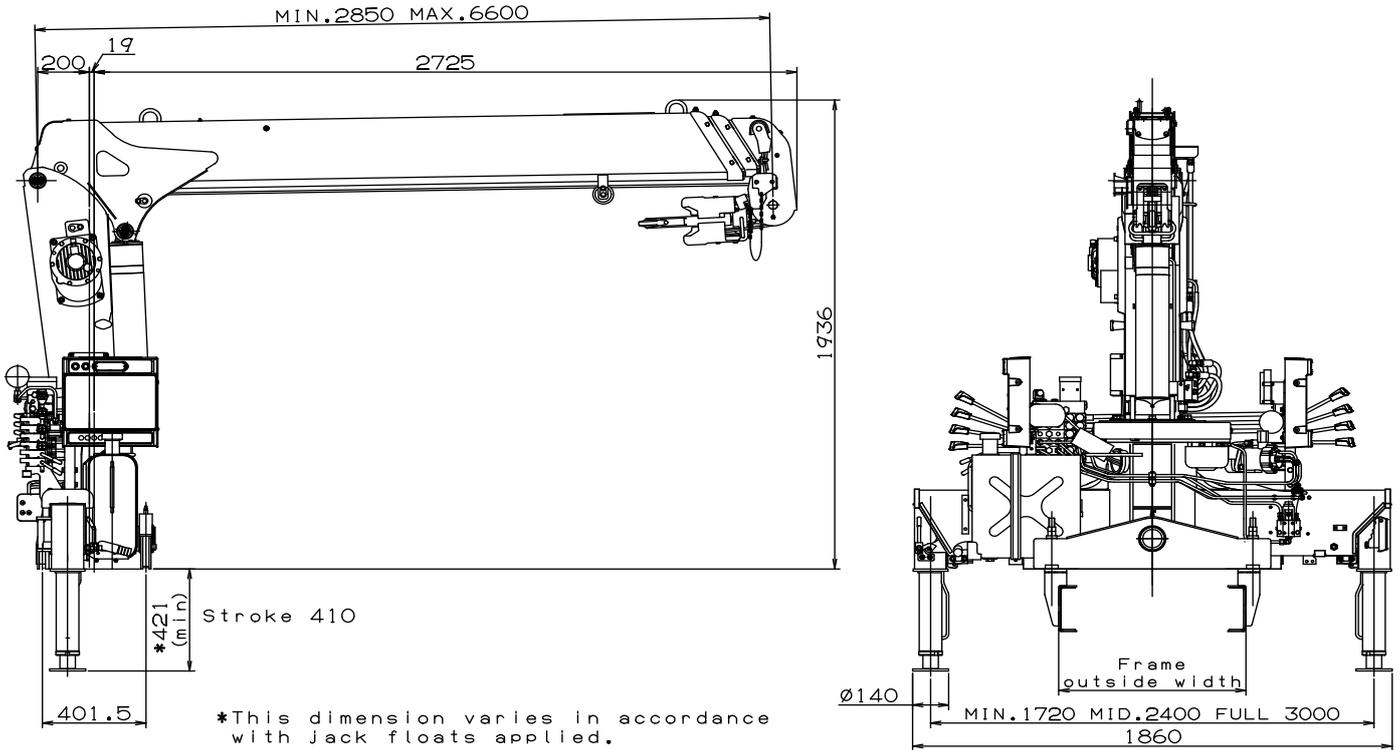

GENERAL DATA FOR SUITABLE TRUCKS

Gross vehicle mass (including crane mass) -----	4,500 to 8,000 kg
P.T.O. torque -----	140 N-m {14.3 kgf-m} min.
P.T.O. revolution -----	Approx. 300 to 1,700 min ⁻¹ {rpm}
Width for crane mounting -----	Approx. 605 mm min.
Frame -----	Weight distribution and frame strength should be calculated for each truck
Frame outside width range -----	Approx. 680 to 790 mm
Frame height (ground to frame top) -----	Approx. 1010 mm max. (Height of crane mounting base can be changed by combination of jack floats and crane bases)