

TADANO CARGO CRANE

MODEL : **TM-ZE295MH**

CRANE SPECIFICATIONS

CRANE CAPACITY

3,030 kg at 1.5 m (4-part lines)

BOOM

Five-sectioned, fully powered partly synchronized telescoping boom of heptagonal box construction

Fully retracted length ----- 3.13 m

Fully extended length ----- 10.8 m

Extending speed ----- 7.67 m in 15.5 s

Elevation ----- Elevated by a double-acting hydraulic cylinder

Raising speed ----- 1° to 76° in 6 s

Boom point ----- 2 sheaves

WINCH

Hydraulic motor driven Spur gear speed reduction, provided with mechanical brake and cable follower

Single line pull ----- 7.45 kN {760 kgf}

Single line speed ----- 68 m/min (at 4th layer)

Wire rope

Diameter x length ----- 8 mm x 66 m

Breaking strength ----- 43.1 kN {4.39 tf}

Construction ----- 7 x 7 + 6 x WS (26)

Hook block ----- 2 sheaves

HOOK BLOCK STOWING DEVICE

Hook-in (Mechanically stowed beneath boom top portion)

SLEWING

Hydraulic motor driven Worm gear speed reduction

Continuous 360° full circle slewing on ball bearing slew ring

Automatic slewing lock

Slewing speed ----- 2.5 min⁻¹ {rpm}

Specifications are subject to change without notice.

OUTRIGGERS

Manually operated beams and hydraulically operated jacks
Integral with crane frame

Extension width ----- Min. 1,720 mm center to center
(1,860 mm outer to outer)

Mid. 2,400 mm center to center
(2,540 mm outer to outer)

Mid. 2,900 mm center to center
(3,040 mm outer to outer)

Max. 3,400 mm center to center
(3,540 mm outer to outer)

HYDRAULIC SYSTEM

Hydraulic pump ----- Single gear pump

Hydraulic motors ----- Axial piston type for winch
Axial piston type for slewing

Control valves ----- Multiple control valves with integral
safety valve

Oil tank capacity ----- Approx. 28.7 L

SAFETY DEVICES

Anti-two-block device

Boom angle indicator

Load indicator

Load meter

Hook safety latch

Spirit level

Hydraulic safety valves, check valves and holding valves

OPTIONAL EQUIPMENT Emergency hydraulic pump

Outrigger pads

Rear outriggers (outrigger beam extension type)

CRANE MASS

Approx. 1,060 kg

(Except crane options and munting parts.)

NOTE : Each operating speeds show the value when there is no load conditions and the pump delivery is the following conditions.

- 32 L/min (Slewing speed)
- 53 L/min (BOOM : Extending speed, Raising speed WINCH : Single line speed)

RATED LIFTING CAPACITIES (kg)

Table C


LOAD RADIUS	3.13 m / 5.07 m BOOM			LOAD RADIUS	7.0 m BOOM	
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS
		extension width of outriggers				extension width of outriggers
		MAX.	MIN.		MAX.	
1.5 m and below	3,030	3,030	1,580	2.2 m and below	1,880	1,880
2.0 m	2,180	2,180	980	2.5 m	1,680	1,680
2.5 m	1,730	1,730	630	3.0 m	1,430	1,400
3.0 m	1,430	1,430	480	3.5 m	1,180	1,130
3.5 m	1,230	1,130	380	4.0 m	1,030	850
4.0 m	1,080	850	280	4.5 m	880	680
4.5 m	930	680	230	5.0 m	780	550
4.87 m	830	580	200	5.5 m	680	450
				6.0 m	630	400
				6.8 m	530	300

LOAD RADIUS	8.9 m BOOM		LOAD RADIUS	10.8 m BOOM	
	CRANE STRENGTH	EMPTY CHASSIS		CRANE STRENGTH	EMPTY CHASSIS
		extension width of outriggers			extension width of outriggers
		MAX.		MAX.	
3.0 m and below	1,030	1,030	4.0 m and below	680	680
3.5 m	950	900	4.5 m	630	600
4.0 m	830	780	5.0 m	580	530
5.0 m	680	550	6.0 m	480	400
6.0 m	580	400	7.0 m	400	300
7.0 m	500	300	8.0 m	350	230
8.0 m	430	230	9.0 m	300	200
8.7 m	400	200	10.0 m	250	180
			10.6 m	230	150

Table D

LOAD RADIUS	3.13 m / 5.07 m BOOM			LOAD RADIUS	7.0 m BOOM	
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS
		extension width of outriggers				extension width of outriggers
		MAX.	MIN.		MAX.	
1.5 m and below	3,030	3,030	1,580	2.2 m and below	1,880	1,880
2.0 m	2,180	2,180	980	2.5 m	1,680	1,680
2.5 m	1,730	1,730	630	3.0 m	1,430	1,430
3.0 m	1,430	1,430	480	3.5 m	1,180	1,180
3.5 m	1,230	1,230	380	4.0 m	1,030	1,030
4.0 m	1,080	1,080	280	4.5 m	880	880
4.5 m	930	930	230	5.0 m	780	780
4.87 m	830	830	200	5.5 m	680	680
				6.0 m	630	630
				6.8 m	530	530


LOAD RADIUS	8.9 m BOOM			LOAD RADIUS	10.8 m BOOM	
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS
		extension width of outriggers				extension width of outriggers
		MAX.			MAX.	
3.0 m and below	1,030	1,030		4.0 m and below	680	680
3.5 m	950	950		4.5 m	630	630
4.0 m	830	830		5.0 m	580	580
5.0 m	680	680		6.0 m	480	480
6.0 m	580	580		7.0 m	400	400
7.0 m	500	500		8.0 m	350	350
8.0 m	430	430		9.0 m	300	300
8.7 m	400	400		10.0 m	250	250
				10.6 m	230	230

- NOTE :
1. Empty Chassis Rated Capacities in these tables depend on condition that crane is set level on firm level ground.
 2. This value includes the mass of lifting devices such as hook block (30kg).
 3. When the outriggers are extended to the middle width, read the capacities rated for the minimum extension width.
 4. Fully extend the front outriggers when working with a boom length exceeding 5.07m.
 5. This load radius shows actual load radius which includes boom deflection.
 6. If the boom length exceeds the table value even a little, the performance is limited to the performance of the next boom length.
 7. When the boom length is 8.9 m, a half of the  mark on lateral face of the 4th boom section is exposed out of 3rd boom section.
 8. Empty chassis rated lifting capacity varies according to the working area.
 - Front mounting <over-side, over-rear area> : 100%
 - <over-front area> : 25%
 9. Empty Chassis Rated Capacities table C and D depend on the types of chassis.
 (The following table shows guidelines for bodywork vehicles that can achieve the rated lifting capacity table C for vehicles. The rated lifting capacity may not be applicable depending on vehicle specifications. Be sure to carry out a stability inspection to determine which rated lifting capacity tables to apply.)


C	4.5 t ≤ GVW < 8.0 t, 3395 mm ≤ WB (*1), 1995 mm ≤ Vehicle width
---	---

*1 : From the front axle to the farthest rear axle.


Extension mark

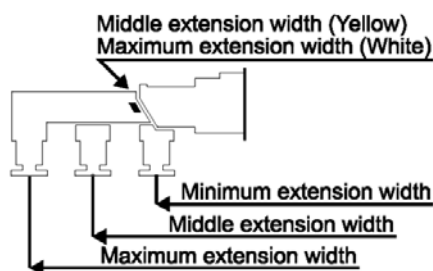

Front mounting




WORKING RANGE

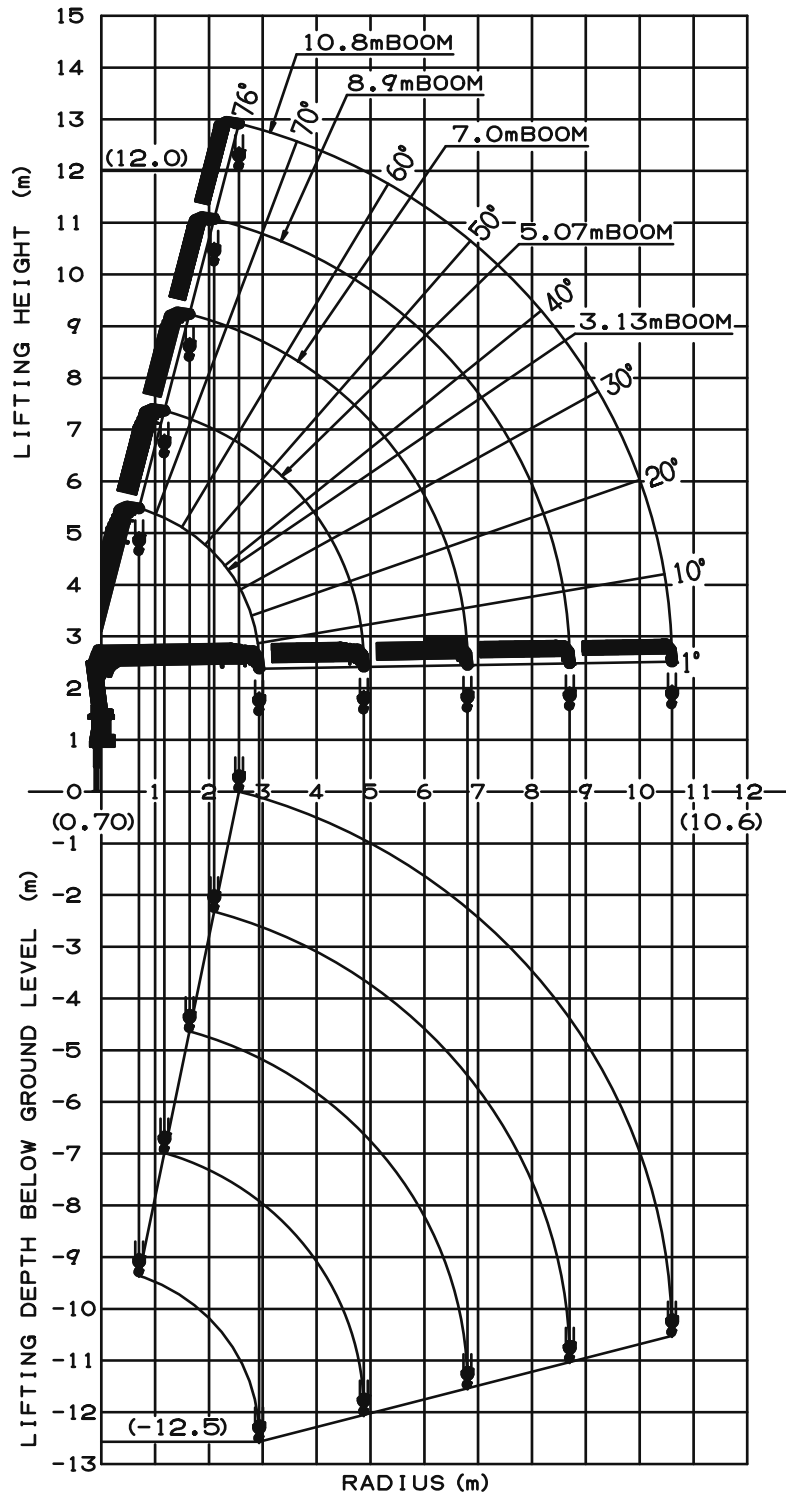

NOTE : The above lifting heights and boom angles are based on a straight (unladen) boom, and allowance should be made for boom deflection obtained under laden conditions.

DIMENSIONS

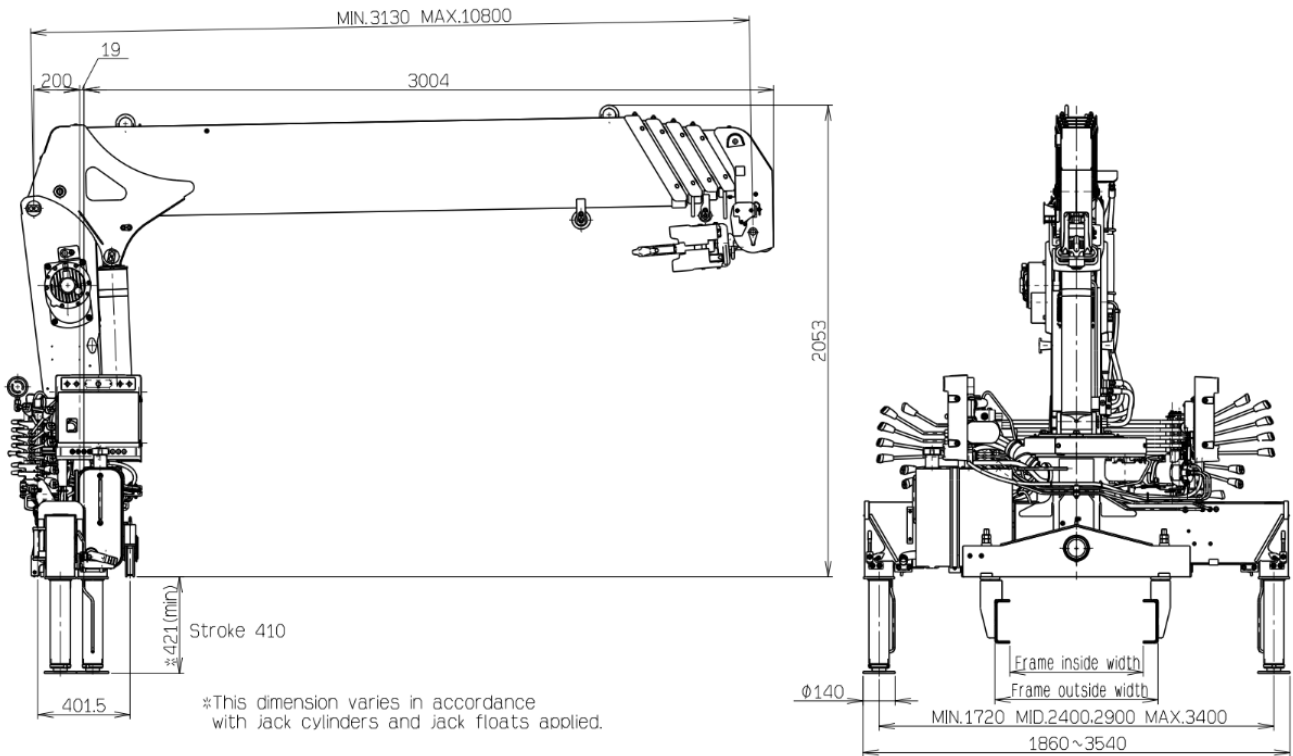

GENERAL DATA FOR SUITABLE TRUCKS

Even within range of this data, bodywork may not be possible depending on the specifications of the truck.

Gross vehicle weight	4,500 to 8,000 kg
Wheel base (*1)	3,395 mm min.
P.T.O. torque	140 N·m {14.3 kgf·m} min.
P.T.O. revolution range of use (min. to max.)	Approx. 350 to 1,360 min ⁻¹ {rpm}
Width for crane mounting	Approx. 605 mm min.
Frame	Weight distribution and frame strength should be calculated for each truck
Frame width range (inside to outside)	Approx. 680 to 860 mm
Frame height (ground to chassis frame top) (*2)	Approx. 640 to 760 mm
Chassis frame section modulus (*3)	70 cm ³ min.

*1 From the front axle to the farthest rear axle.

*2 Height of crane mounting surface is changed by crane bases.

*3 The chassis frame material must meet the following conditions at the crane mounting location.

—Yield point : 392 N/mm²

—Tensile strength : 540 N/mm²