

TADANO CARGO CRANE

MODEL : **TM-ZE363MH**

CRANE SPECIFICATIONS

CRANE CAPACITY

3,030 kg at 2.7 m (4-part lines)

BOOM

Three-sectioned, fully hydraulic telescoping boom of heptagonal box construction

Fully retracted length ----- 3.28 m

Fully extended length ----- 7.71 m

Extending speed ----- 4.43 m in 12 s

Elevation ----- Elevated by a double-acting hydraulic cylinder

Raising speed ----- 1° to 78° in 7.5 s

Boom point ----- 2 sheaves

WINCH

Hydraulic motor driven Spur gear speed reduction, provided with mechanical brake

Single line pull ----- 7.45 kN {760 kgf}

Single line speed ----- 76 m/min (at 4th layer)

Wire rope

Diameter x length ----- 8 mm x 51 m

Breaking strength ----- 43.1 kN {4.39 tf}

Construction ----- 7 x 7 + 6 x WS (26)

Hook block ----- 2 sheaves

HOOK BLOCK STOWING DEVICE

Hook-in (Mechanically stowed beneath boom top portion)

SLEWING

Hydraulic motor driven Worm gear speed reduction

Continuous 360° full circle slewing on ball bearing slew ring

Automatic slewing lock

Slewing speed ----- 2.5 min⁻¹ {rpm}

Specifications are subject to change without notice.

OUTRIGGERS

Manually operated beams and hydraulically operated jacks
Integral with crane frame

Extension width ----- Min. 2,000 mm center to center
(2,150 mm outer to outer)
Mid. 2,900 mm center to center
(3,050 mm outer to outer)
Mid. 3,600 mm center to center
(3,750 mm outer to outer)
Max. 4,200 mm center to center
(4,350 mm outer to outer)

HYDRAULIC SYSTEM

Hydraulic pump ----- Single gear pump
Hydraulic motors ----- Axial piston type for winch
Axial piston type for slewing
Control valves ----- Multiple control valves with integral
safety valve
Oil tank capacity ----- Approx. 41.1 L

SAFETY DEVICES

Anti-two-block device
Boom angle indicator
Load indicator
Load meter
Hook safety latch
Spirit level
Hydraulic safety valves, check valves and holding valves

OPTIONAL EQUIPMENT

Emergency hydraulic pump
Outrigger pads
Oil cooler
Rear outriggers (outrigger beam extension type)

CRANE MASS

Approx. 1,160 kg
(Except crane options and mounting parts.)

NOTE : Each operating speeds show the value when there is no load conditions and the pump delivery is the following conditions.

- 36 L/min (Slewing speed)
- 60 L/min (BOOM : Extending speed, Raising speed WINCH : Single line speed)

RATED LIFTING CAPACITIES (kg)

Table A

LOAD RADIUS	3.28 m / 5.51 m BOOM			LOAD RADIUS	7.71 m BOOM	
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS
		extension width of outriggers				extension width of outriggers
		MAX.	MIN.		MAX.	
2.4 m and below	3,030	3,030	1,380	2.7 m and below	2,400	2,400
2.7 m	3,030	3,030	1,130	3.2 m	2,080	2,080
3.0 m	2,580	2,580	930	3.5 m	1,930	1,900
3.5 m	2,180	2,080	730	4.0 m	1,680	1,600
4.0 m	1,880	1,600	580	4.5 m	1,530	1,330
4.5 m	1,680	1,330	480	5.0 m	1,380	1,100
5.0 m	1,480	1,100	430	5.5 m	1,280	980
5.3 m	1,380	1,000	380	6.0 m	1,180	850
				6.5 m	1,080	750
				7.0 m	1,000	680
				7.5 m	930	600

Table C

LOAD RADIUS	3.28 m / 5.51 m BOOM			LOAD RADIUS	7.71 m BOOM	
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS
		extension width of outriggers				extension width of outriggers
		MAX.	MIN.		MAX.	
2.4 m and below	3,030	3,030	1,630	2.7 m and below	2,400	2,400
2.7 m	3,030	3,030	1,330	3.2 m	2,080	2,080
3.0 m	2,580	2,580	1,100	3.5 m	1,930	1,930
3.5 m	2,180	2,180	880	4.0 m	1,680	1,680
4.0 m	1,880	1,880	700	4.5 m	1,530	1,530
4.5 m	1,680	1,680	580	5.0 m	1,380	1,380
5.0 m	1,480	1,480	480	5.5 m	1,280	1,280
5.3 m	1,380	1,350	430	6.0 m	1,180	1,150
				6.5 m	1,080	1,000
				7.0 m	1,000	900
				7.5 m	930	800

Table D


LOAD RADIUS	3.28 m / 5.51 m BOOM			LOAD RADIUS	7.71 m BOOM	
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS
		extension width of outriggers				extension width of outriggers
		MAX.	MIN.		MAX.	
2.4 m and below	3,030	3,030	1,630	2.7 m and below	2,400	2,400
2.7 m	3,030	3,030	1,330	3.2 m	2,080	2,080
3.0 m	2,580	2,580	1,100	3.5 m	1,930	1,930
3.5 m	2,180	2,180	880	4.0 m	1,680	1,680
4.0 m	1,880	1,880	700	4.5 m	1,530	1,530
4.5 m	1,680	1,680	580	5.0 m	1,380	1,380
5.0 m	1,480	1,480	480	5.5 m	1,280	1,280
5.3 m	1,380	1,380	430	6.0 m	1,180	1,180
				6.5 m	1,080	1,080
				7.0 m	1,000	1,000
				7.5 m	930	930

- NOTE :
1. Empty Chassis Rated Capacities in these tables depend on condition that crane is set level on firm level ground.
 2. This value includes the mass of lifting devices such as hook block (30kg).
 3. When the outriggers are extended to the middle width, read the capacities rated for the minimum extension width.
 4. Fully extend the front outriggers when working with a boom length exceeding 5.51m.
 5. This load radius shows actual load radius which includes boom deflection.
 6. If the boom length exceeds the table value even a little, the performance is limited to the performance of the next boom length.
 7. Empty chassis rated lifting capacity varies according to the working area.
 - Front mounting <over-side, over-rear area> : 100%
 - <over-front area> : 25%
 8. Empty Chassis Rated Capacities table A,C and D depend on the types of chassis. (The following table shows guidelines for bodywork vehicles that can achieve the rated lifting capacity tables A and C for vehicles. The rated lifting capacity may not be applicable depending on vehicle specifications. Be sure to carry out a stability inspection to determine which rated lifting capacity tables to apply.)


A	8.0 t ≤ GVW < 17.0 t
C	11.0 t ≤ GVW < 17.0 t, 4200 mm ≤ WB (*1)

*1 : From the front axle to the farthest rear axle.


Extension mark

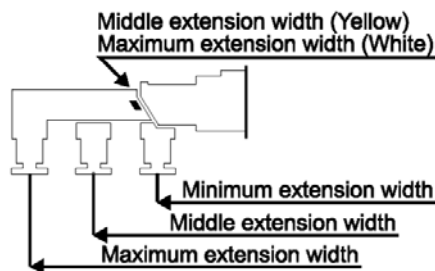

Front mounting




WORKING RANGE

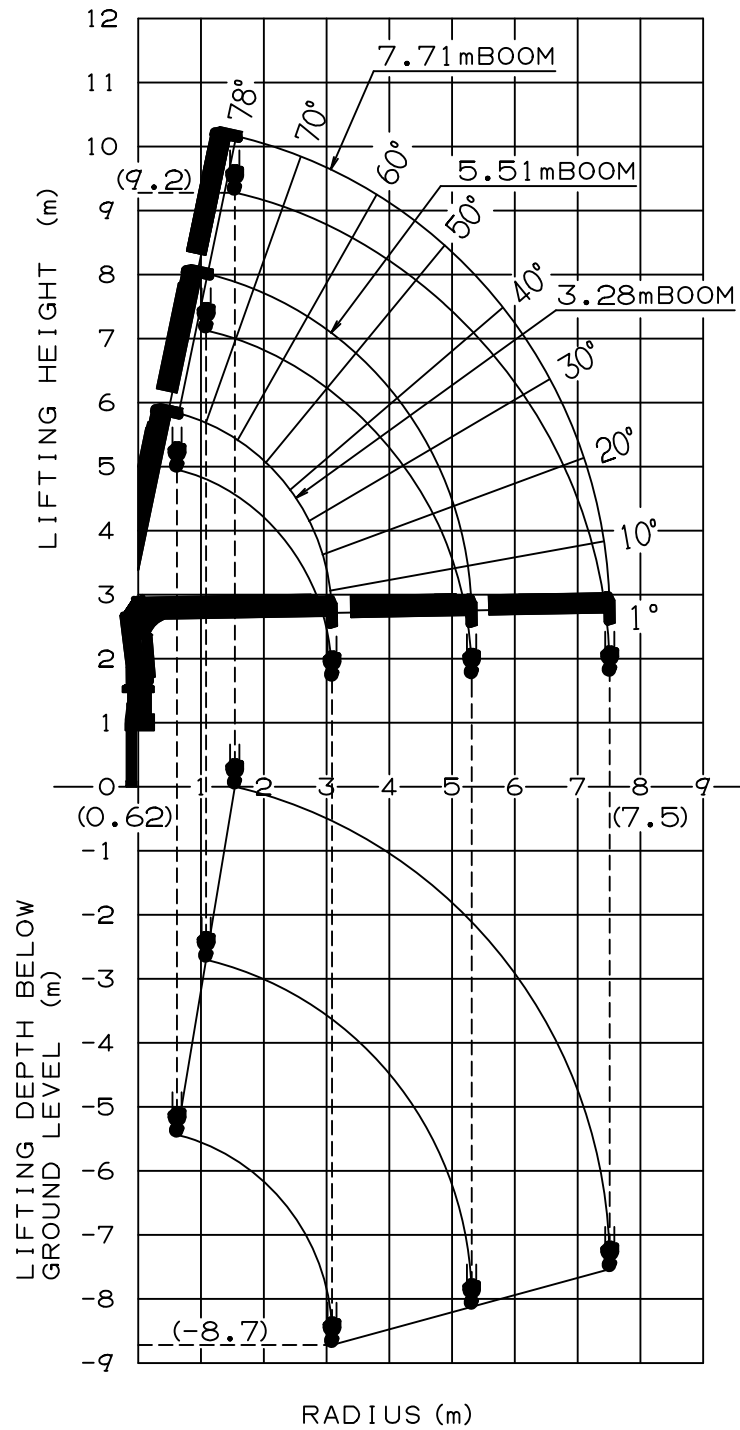

NOTE : The above lifting heights and boom angles are based on a straight (unladen) boom, and allowance should be made for boom deflection obtained under laden conditions.

DIMENSIONS

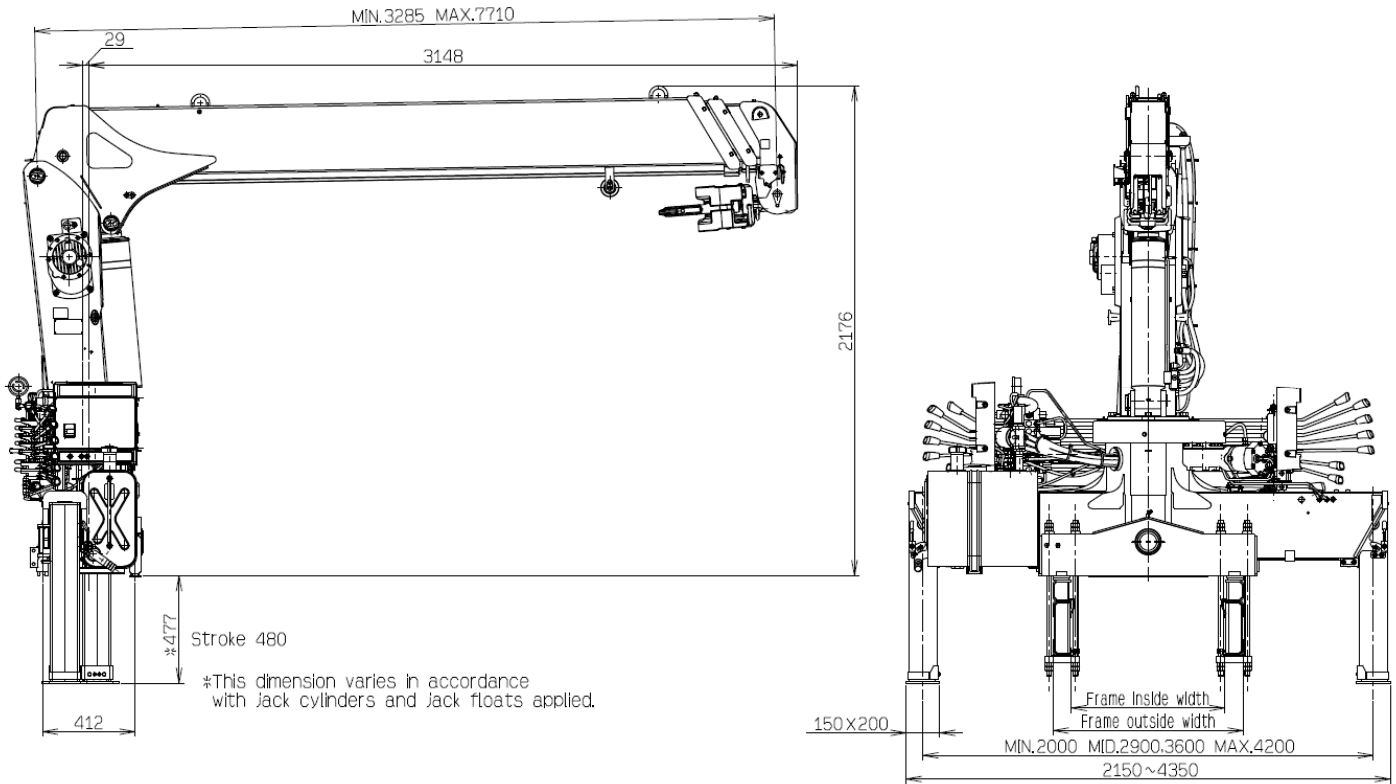

GENERAL DATA FOR SUITABLE TRUCKS

Even within range of this data, bodywork may not be possible depending on the specifications of the truck.

Gross vehicle weight	8,000 to 17,000 kg
P.T.O. torque	190 N·m {19.4 kgf·m} min.
P.T.O. revolution range of use (min. to max.)	Approx. 350 to 1,300 min ⁻¹ {rpm}
Width for crane mounting	Approx. 640 mm min.
Frame	Weight distribution and frame strength should be calculated for each truck
Frame width range (inside to outside)	Approx. 610 to 860 mm
Frame height (ground to chassis frame top) (※1)	Approx. 615 to 810 mm
Chassis frame section modulus (※2)	238 cm ³ min.

※1 Height of crane mounting surface is changed by crane bases.

※2 The chassis frame material must meet the following conditions at the crane mounting location.

—Yield point : 392 N/mm²

—Tensile strength : 540 N/mm²