

## TADANO CARGO CRANE

MODEL : **TM-ZE554MH**

## CRANE SPECIFICATIONS

<u>CRANE CAPACITY</u>	5,050 kg at 2.5 m (5-part line)
<u>BOOM</u>	Four-sectioned, fully powered partly synchronized telescoping boom of heptagonal box construction Fully retracted length ----- 3.55 m Fully extended length ----- 10.8 m Extending speed ----- 7.25 m in 21 s Elevation ----- Elevated by a double-acting hydraulic cylinder Raising speed ----- 1° to 78° in 12 s Boom point ----- 3 sheaves
<u>WINCH</u>	Hydraulic motor driven    Spur gear speed reduction, provided with mechanical brake and cable follower Single line pull ----- 9.90 kN {1,010 kgf} Single line speed ----- 66 m/min (at 4th layer) Wire rope Diameter x length ----- 8 mm x 82 m Breaking strength ----- 50.1 kN {5.1 tf} Construction ----- 7 x 7 + 6 x WS(26) Hook block ----- 2 sheaves
<u>HOOK BLOCK STOWING DEVICE</u>	Hook-in (Mechanically stowed beneath boom top portion)
<u>SLEWING</u>	Hydraulic motor driven    Worm gear speed reduction Continuous 360° full circle slewing on ball bearing slew ring Automatic slewing lock Slewing speed ----- 2.5 min <sup>-1</sup> {rpm}

Specifications are subject to change without notice.

OUTRIGGERS

Manually operated beams and hydraulically operated jacks

Integral with crane frame

Extended width ----- Min. 2,200 mm center to center  
 (2,360 mm outer to outer)  
 Mid. 3,000 mm center to center  
 (3,160 mm outer to outer)  
 Max. 3,800 mm center to center  
 (3,960 mm outer to outer)

HYDRAULIC SYSTEM

Hydraulic pump ----- Single gear pump  
 Hydraulic motors ----- Axial piston type for winch  
 Axial piston type for slewing  
 Control valves ----- Multiple control valves with integral  
 safety valve  
 Oil tank capacity ----- Approx. 57.6 L

SAFETY DEVICES

Anti-two-block device  
 Boom angle indicator  
 Load indicator  
 Load meter  
 Hook safety latch  
 Spirit level  
 Hydraulic safety valves, check valves and holding valves

OPTIONAL EQUIPMENT

Emergency hydraulic pump  
 Outrigger pads  
 Oil cooler  
 Rear outriggers (outrigger beam non-extension type)  
 Large capacity oil tank

CRANE MASS

Approx. 1,640 kg  
 (Except crane options and mounting parts.)

NOTE : 1. Each operating speeds show the value when there is no load conditions and the pump delivery is the following conditions.

- 36 L/min (Slewing speed)
- 60 L/min (BOOM : Extending speed, Raising speed WINCH : Single line speed)

**RATED LIFTING CAPACITIES (kg)**

Table A

LOAD RADIUS	3.55 m BOOM			LOAD RADIUS	5.99 m BOOM		
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS	
		extension width of outriggers				extension width of outriggers	
		MAX.	MIN.			MAX.	MIN.
2.5 m and below	5,050	5,050	2,630	2.5 m and below	4,050	4,050	2,480
2.9 m	4,050	3,900	2,080	2.8 m	4,050	4,050	2,130
3.33 m	3,550	3,250	1,680	2.9 m	4,050	3,900	2,080
				3.7 m	3,130	2,800	1,380
				4.0 m	2,930	2,430	1,180
				4.5 m	2,580	1,980	930
				5.0 m	2,330	1,680	830
				5.77 m	2,030	1,330	650

LOAD RADIUS	8.39 m BOOM			LOAD RADIUS	10.8 m BOOM		
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS	
		extension width of outriggers				extension width of outriggers	
		MAX.	MIN.			MAX.	MIN.
2.6 m and below	3,130	3,130	2,480	3.5 m and below	2,130	2,130	1,480
3.0 m	3,130	3,130	1,880	4.0 m	2,130	2,130	1,180
3.7 m	3,130	2,800	1,380	4.5 m	2,130	1,980	930
4.0 m	2,930	2,430	1,180	5.0 m	2,030	1,630	780
4.5 m	2,580	1,980	930	6.0 m	1,780	1,180	580
5.0 m	2,330	1,680	830	7.0 m	1,530	1,000	450
5.5 m	2,080	1,430	680	8.0 m	1,380	800	380
6.0 m	1,930	1,180	580	9.0 m	1,200	680	330
6.5 m	1,780	1,130	550	10.0 m	1,050	580	270
7.0 m	1,630	1,000	480	10.58 m	1,000	550	240
7.5 m	1,480	900	430				
8.17 m	1,380	780	380				

Table B

LOAD RADIUS	3.55 m BOOM			LOAD RADIUS	5.99 m BOOM		
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS	
		extension width of outriggers				extension width of outriggers	
		MAX.	MIN.			MAX.	MIN.
2.5 m and below	5,050	5,050	2,880	2.6 m and below	4,050	4,050	2,750
2.9 m	4,050	4,050	2,380	2.8 m	4,050	4,050	2,500
3.33 m	3,550	3,550	1,950	2.9 m	4,050	4,050	2,380
				3.7 m	3,130	3,130	1,580
				4.0 m	2,930	2,930	1,430
				4.5 m	2,580	2,430	1,180
				5.0 m	2,330	2,030	980
				5.77 m	2,030	1,630	780

LOAD RADIUS	8.39 m BOOM			LOAD RADIUS	10.8 m BOOM		
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS	
		extension width of outriggers				extension width of outriggers	
		MAX.	MIN.			MAX.	MIN.
2.6 m and below	3,130	3,130	2,750	3.5 m and below	2,130	2,130	1,730
3.0 m	3,130	3,130	2,280	4.0 m	2,130	2,130	1,430
3.7 m	3,130	3,130	1,580	4.5 m	2,130	2,130	1,180
4.0 m	2,930	2,930	1,430	5.0 m	2,030	1,980	930
4.5 m	2,580	2,430	1,180	6.0 m	1,780	1,480	730
5.0 m	2,330	2,030	980	7.0 m	1,530	1,180	580
5.5 m	2,080	1,730	830	8.0 m	1,380	950	480
6.0 m	1,930	1,480	730	9.0 m	1,200	880	430
6.5 m	1,780	1,380	680	10.0 m	1,050	730	350
7.0 m	1,630	1,230	630	10.58 m	1,000	680	330
7.5 m	1,480	1,080	530				
8.17 m	1,380	980	480				

Table C

LOAD RADIUS	3.55 m BOOM			LOAD RADIUS	5.99 m BOOM		
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS	
		extension width of outriggers				extension width of outriggers	
		MAX.	MIN.			MAX.	MIN.
2.5 m and below	5,050	5,050	3,280	2.6 m and below	4,050	4,050	3,130
2.9 m	4,050	4,050	2,750	2.8 m	4,050	4,050	2,880
3.33 m	3,550	3,550	2,280	2.9 m	4,050	4,050	2,750
				3.7 m	3,130	3,130	1,870
				4.0 m	2,930	2,930	1,630
				4.5 m	2,580	2,580	1,380
				5.0 m	2,330	2,330	1,130
				5.77 m	2,030	2,030	930

LOAD RADIUS	8.39 m BOOM			LOAD RADIUS	10.8 m BOOM		
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS	
		extension width of outriggers				extension width of outriggers	
		MAX.	MIN.			MAX.	MIN.
2.6 m and below	3,130	3,130	3,130	3.5 m and below	2,130	2,130	1,930
3.0 m	3,130	3,130	2,630	4.0 m	2,130	2,130	1,630
3.7 m	3,130	3,130	1,870	4.5 m	2,130	2,130	1,330
4.0 m	2,930	2,930	1,630	5.0 m	2,030	2,030	1,080
4.5 m	2,580	2,580	1,380	6.0 m	1,780	1,780	780
5.0 m	2,330	2,330	1,130	7.0 m	1,530	1,480	730
5.5 m	2,080	2,030	930	8.0 m	1,380	1,200	550
6.0 m	1,930	1,830	830	9.0 m	1,200	1,030	500
6.5 m	1,780	1,650	780	10.0 m	1,050	900	430
7.0 m	1,630	1,480	730	10.58 m	1,000	830	380
7.5 m	1,480	1,350	650				
8.17 m	1,380	1,180	550				

Table D

LOAD RADIUS	3.55 m BOOM			LOAD RADIUS	5.99 m BOOM		
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS	
		extension width of outriggers				extension width of outriggers	
		MAX.	MIN.			MAX.	MIN.
2.5 m and below	5,050	5,050	3,380	2.6 m and below	4,050	4,050	3,230
2.9 m	4,050	4,050	2,750	2.8 m	4,050	4,050	2,900
3.33 m	3,550	3,550	2,280	2.9 m	4,050	4,050	2,750
				3.7 m	3,130	3,130	1,870
				4.0 m	2,930	2,930	1,630
				4.5 m	2,580	2,580	1,380
				5.0 m	2,330	2,330	1,130
				5.77 m	2,030	2,030	930


LOAD RADIUS	8.39 m BOOM			LOAD RADIUS	10.8 m BOOM		
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS	
		extension width of outriggers				extension width of outriggers	
		MAX.	MIN.			MAX.	MIN.
2.6 m and below	3,130	3,130	3,130	3.5 m and below	2,130	2,130	1,930
3.0 m	3,130	3,130	2,630	4.0 m	2,130	2,130	1,630
3.7 m	3,130	3,130	1,870	4.5 m	2,130	2,130	1,330
4.0 m	2,930	2,930	1,630	5.0 m	2,030	2,030	1,080
4.5 m	2,580	2,580	1,380	6.0 m	1,780	1,780	780
5.0 m	2,330	2,330	1,130	7.0 m	1,530	1,530	730
5.5 m	2,080	2,080	930	8.0 m	1,380	1,380	550
6.0 m	1,930	1,930	830	9.0 m	1,200	1,200	500
6.5 m	1,780	1,780	780	10.0 m	1,050	1,050	430
7.0 m	1,630	1,630	730	10.58 m	1,000	1,000	380
7.5 m	1,480	1,480	650				
8.17 m	1,380	1,380	550				

- NOTE :
1. Empty Chassis Rated Capacities in these tables depend on condition that crane is set level on firm level ground.
  2. This value includes the mass of lifting devices such as hook block (45kg).
  3. When the outriggers are extended to the middle width, read the capacities rated for the minimum extension width.
  4. This load radius shows actual load radius which includes boom deflection.
  5. If the boom length exceeds the table value even a little, the performance is limited to the performance of the next boom length.
  6. When the boom length is 8.39 m, a half of the  $\sphericalangle$  mark on lateral face of the 3rd boom section is exposed out of 2nd boom section.
  7. Empty chassis rated lifting capacity varies according to the working area.
    - Front mounting <over-side, over-rear area> : 100%
    - <over-front area> : 25%
  8. Empty Chassis Rated Capacities table A, B, C and D depend on the types of chassis. (The following table shows guidelines for bodywork vehicles that can achieve the rated lifting capacity tables A, B, C and D for vehicles. The rated lifting capacity may not be applicable depending on vehicle specifications. Be sure to carry out a stability inspection to determine which rated lifting capacity tables to apply.)


A	15 t ≤ GVW, 2.9 t ≤ CAWf (*1)
B	25 t ≤ GVW, 3.8 t ≤ CAWf (*1)
C	25 t ≤ GVW, 4.4 t ≤ CAWf (*1)
D	25 t ≤ GVW, 4.7 t ≤ CAWf (*1)

\*1 : Chassis front axle weight (excluding crane and mounting parts mass).


Extension mark

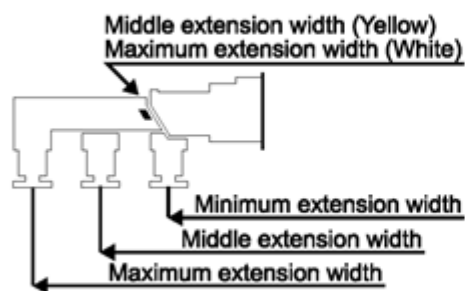

Front mounting




# WORKING RANGE

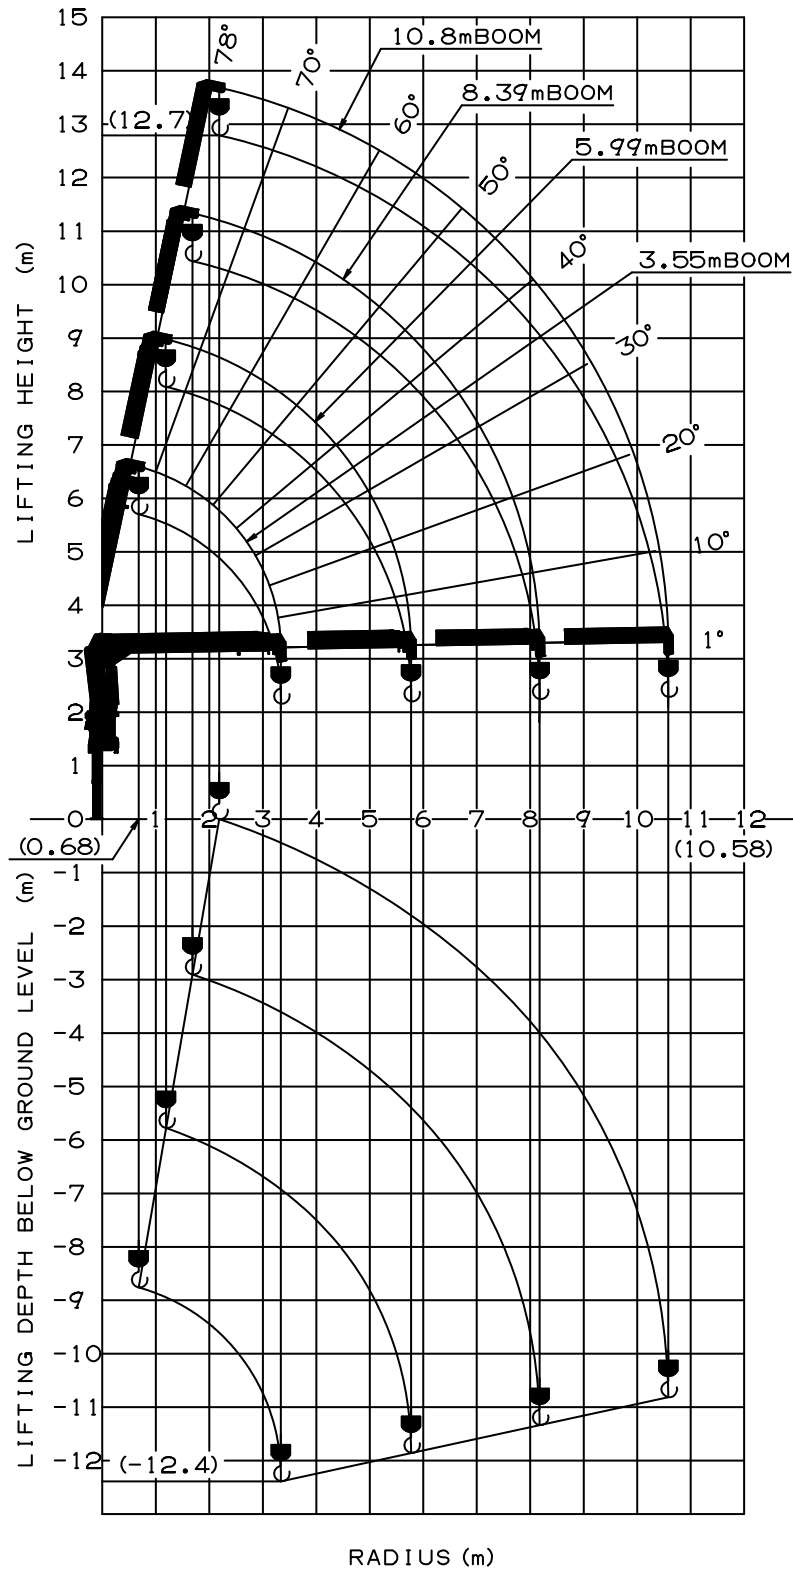

NOTE: The above lifting heights and boom angles are based on a straight (unladen) boom, and allowance should be made for boom deflection obtained under laden conditions.



## DIMENSIONS

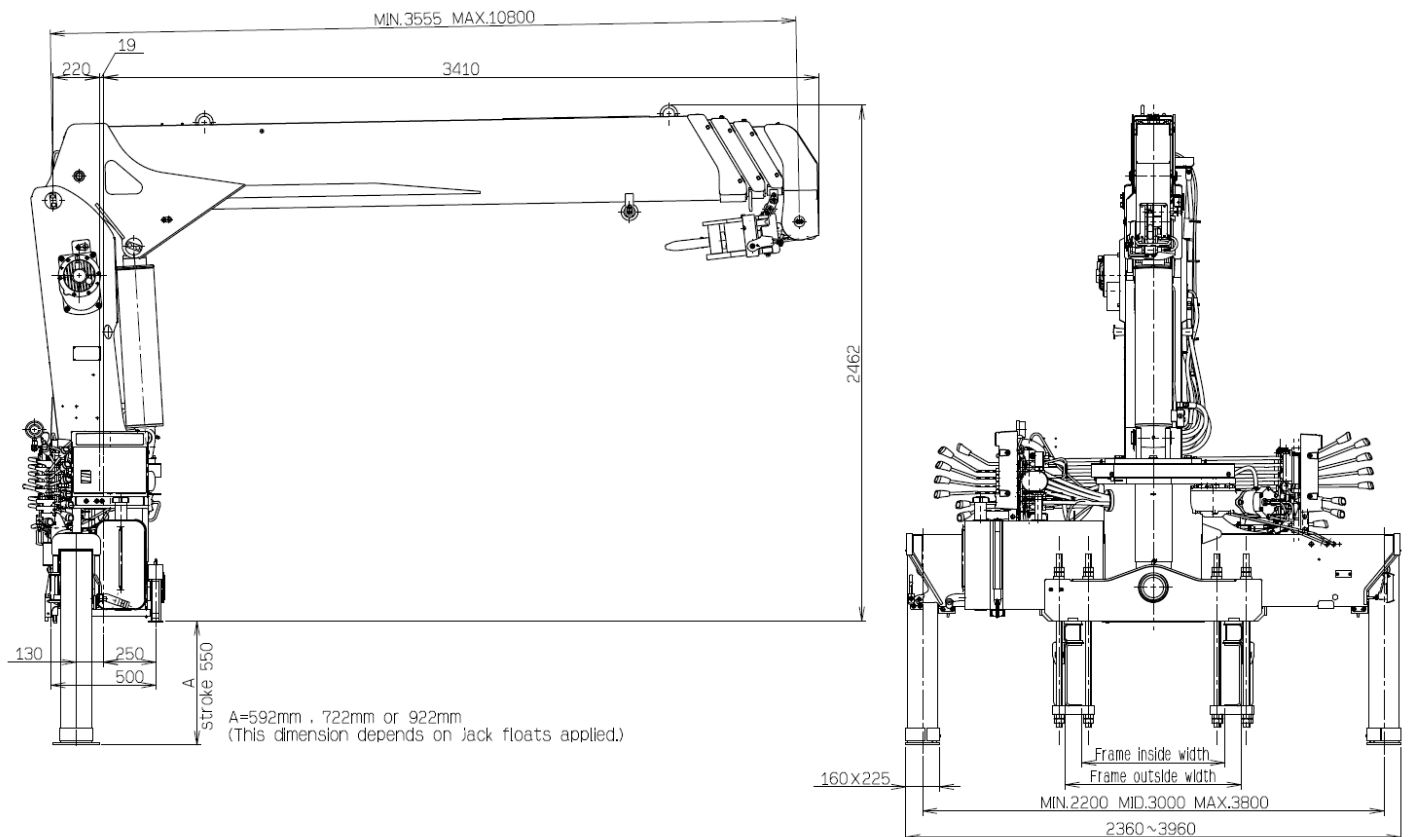

## GENERAL DATA FOR SUITABLE TRUCKS

Even within range of this data, bodywork may not be possible depending on the specifications of the truck.

Gross vehicle weight	15,000 kg min.
Chassis front axle weight (excluding crane and mounting parts mass)	2,900 kg min.
P.T.O. torque	190 N·m {19.4 kgf·m} min.
P.T.O. revolution range of use (min. to max.)	Approx. 350 to 1,300 min <sup>-1</sup> {rpm}
Width for crane mounting	Approx. 750 mm min.
Frame	Weight distribution and frame strength should be calculated for each truck
Frame width range (inside to outside)	Approx. 610 to 960 mm
Frame height (ground to chassis frame top) (*1)	Approx. 880 to 1,145 mm
Chassis frame section modulus (*2)	485 cm <sup>3</sup> min.

\*1 Height of crane mounting surface is changed by crane bases.

\*2 The chassis frame material must meet the following conditions at the crane mounting location.

—Yield point : 392 N/mm<sup>2</sup>

—Tensile strength : 540 N/mm<sup>2</sup>