

TADANO CARGO CRANE

MODEL: **TM-ZX1505** series

MODEL	SPEC.	SPEC. No.
TM-ZX1505HRS	Hook-in Radio controller Safety device (AML : Rated capacity indicator/limiter)	TM-150Z-1-03015
TM-ZX1505HRS	Hook-in Radio controller Safety device (AML : Rated capacity indicator)	TM-150Z-1-03025
TM-ZX1505HS	Hook-in Safety device (AML : Rated capacity indicator)	TM-150Z-1-03035
TM-ZX1505HS	Hook-in Safety device (AML : Rated capacity indicator/limiter)	TM-150Z-1-03055

CRANE SPECIFICATIONS

CRANE CAPACITY

15,000 kg at 2.0 m (10-part line)
8,750 kg at 3.5 m (6-part line)

BOOM

Five-sectioned, fully powered partly synchronized telescoping boom of heptagonal box construction with 4 sheaves at boom head

Fully retracted length ----- 5.3 m
Fully extended length----- 18.5 m
Extending speed -----13.2 m in 36 s
Elevation ----- Elevated by two double-acting Hydraulic cylinders
Raising speed ----- 0° to 78 ° in 26 s
Boom point ----- 4 sheaves

WINCH

Hydraulic motor driven Spur gear speed reduction, provided with mechanical brake and cable follower

Single line pull ----- 14.72 kN {1,500 kgf}
Single line speed ----- 62 m/min (at 4th layer)
Wire rope
Diameter x length ----- 10 mm x 107 m
Breaking strength ----- 73.5 kN {7,500 kgf}
Construction ----- 7 x 7 + 6 x Fi (29)
Hook block ----- 9,000kg capacity, 3sheaves (110kg)

HOOK BLOCK STOWING DEVICE

Hook-in (Mechanically stowed beneath boom top portion)

SLEWING

Hydraulic motor driven Worm gear speed reduction
Continuous 360° full circle slewing on ball bearing slew ring
Automatic slewing lock
Slewing speed ----- 1.5 min⁻¹ {rpm}

OUTRIGGERS

Hydraulically operated beams and jacks

Integral with crane frame

Extended width ----- Min. 2,260 mm center to center
(2,460 mm outer to outer)

Mid. 4,000 mm center to center
(4,200 mm outer to outer)

Max. 5,800 mm center to center
(6,000 mm outer to outer)

REAR OUTRIGGERS

Hydraulically operated jacks

Width ----- 2,250 mm center to center
(2,400 mm outer to outer)

HYDRAULIC SYSTEM

Hydraulic pump ----- Tandem gear pump

Hydraulic motors ----- Axial piston type for winch and slewing

Control valves ----- Multiple control valves with integral
safety valves

Oil tank capacity ----- Approx. 130 L

(*1) RADIO CONTROLLER

Model : RCS-F (with colored display)

Control functions of telescoping, hoisting up and down, elevating,
slewing, acceleration, Hook-in, Hook-out, horn, stop operation,
and working height limit.

Frequency ----- 40 frequencies in 433 MHz band

Operating power supply

Transmitter ----- 6V DC, Dry battery R6P (SUM-3) x 4

Control unit ----- 24V DC, Vehicle battery

Transmitter mass ----- Approx. 670 g (includes batteries)

SAFETY DEVICES

Anti-two-block device
 AML (Automatic Moment Limiter)
 Load indication
 Load moment ratio indication
 Warning alarm
 Rated capacity indicator/limiter or Rated capacity indicator
 Limit warning lamp
 Outrigger length detector
 Outrigger asymmetric extension width control
 Limit warning lamp (three-color)
 WHL (Working Height Limiter)
 Boom angle indicator
 Over unwinding prevention
 Hook safety latch
 Spirit level
 Jack interlock
 Boom/outrigger stowing reminder alarm
 Emergency stop switch
 (*1) Stop switch on radio controller
 Hydraulic safety valves, check valves and holding valves

OPTIONAL EQUIPMENT

Outrigger pads
 Oil cooler
 Hook block - 15,000kg capacity (110kg) and boom point additional sheave
 (Hook block : 5 sheaves, swivel type hook with safety latch)
 (*1) Basket mounting support
 Maintenance valve

CRANE MASS

Approx. 5,220 kg
 (Include rear outrigger, hydraulic oil tank and hydraulic oil.
 Except crane options and mounting parts.)

- NOTE : 1. Each operating speeds show the value when there is no load conditions and the pump delivery is the following conditions.
- 36 L/min (Slewing speed)
 - 85 L/min (BOOM : Extending speed, Raising speed WINCH : Single line speed)
2. *1 mark applies only to HRS specifications.

RATED LIFTING CAPACITIES (×1,000 kg)

Table A

5.30 m BOOM										
LOAD RADIUS(m)		2.0 and below	2.5	3.0	3.5	4.0	4.5	4.87		
CRANE STRENGTH		15.00	12.00	10.00	8.75	7.50	6.60	6.10		
EMPTY CHASSIS	extension width of outriggers	MAX.	15.00	12.00	10.00	8.75	7.50	6.60	6.10	
		MID.	15.00	12.00	10.00	7.20	5.40	4.25	3.60	
		MIN.	8.00	5.00	3.50	2.65	2.05	1.60	1.35	

8.60 m BOOM										
LOAD RADIUS(m)		3.0 and below	3.5	4.0	4.5	5.0	6.0	7.0	8.17	
CRANE STRENGTH		6.00	6.00	5.50	5.00	4.70	4.30	4.00	3.55	
EMPTY CHASSIS	extension width of outriggers	MAX.	6.00	6.00	5.50	5.00	4.70	4.30	3.15	2.25
		MID.	6.00	6.00	5.25	4.15	3.35	2.35	1.70	1.20
		MIN.	3.40	2.50	1.90	1.50	1.20	0.75	0.40	0.15

11.90 m BOOM												
LOAD RADIUS(m)		3.5 and below	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10.0	11.47	
CRANE STRENGTH		4.10	4.10	4.10	3.90	3.50	3.20	3.00	2.80	2.60	2.30	
EMPTY CHASSIS	extension width of outriggers	MAX.	4.10	4.10	4.10	3.90	3.50	3.15	2.35	1.90	1.55	1.15
		MID.	4.10	4.10	4.10	3.35	2.35	1.70	1.30	1.00	0.75	0.45
		MIN.	2.50	1.90	1.50	1.20	0.75	0.40	0.20	0.15	-	-

15.20 m BOOM															
LOAD RADIUS(m)		4.0 and below	4.5	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	14.77	
CRANE STRENGTH		4.00	3.80	3.60	3.30	3.00	2.80	2.60	2.40	2.20	2.00	1.85	1.75	1.65	
EMPTY CHASSIS	extension width of outriggers	MAX.	4.00	3.80	3.60	3.30	3.00	2.35	1.90	1.55	1.30	1.10	0.95	0.80	0.70
		MID.	4.00	3.80	3.35	2.35	1.70	1.30	1.00	0.75	0.55	0.45	0.35	0.25	0.22

18.50 m BOOM																
LOAD RADIUS(m)		5.0 and below	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0	18.07	
CRANE STRENGTH		3.45	3.20	2.90	2.70	2.50	2.30	2.10	1.90	1.70	1.55	1.45	1.35	1.25	1.20	
EMPTY CHASSIS	extension width of outriggers	MAX.	3.45	3.20	2.90	2.35	1.90	1.55	1.30	1.10	0.95	0.80	0.70	0.60	0.50	0.45
		MID.	3.35	2.35	1.70	1.30	1.00	0.75	0.55	0.45	0.35	0.25	0.22	0.20	0.18	0.15

Table B

5.30 m BOOM										
LOAD RADIUS(m)		2.0 and below	2.5	3.0	3.5	4.0	4.5	4.87		
CRANE STRENGTH		15.00	12.00	10.00	8.75	7.50	6.60	6.10		
EMPTY CHASSIS	extension width of outriggers	MAX.	15.00	12.00	10.00	8.75	7.50	6.60	6.10	
		MID.	15.00	12.00	10.00	8.55	6.45	5.10	4.35	
		MIN.	9.45	5.95	4.20	3.15	2.45	1.95	1.65	

8.60 m BOOM										
LOAD RADIUS(m)		3.0 and below	3.5	4.0	4.5	5.0	6.0	7.0	8.17	
CRANE STRENGTH		6.00	6.00	5.50	5.00	4.70	4.30	4.00	3.55	
EMPTY CHASSIS	extension width of outriggers	MAX.	6.00	6.00	5.50	5.00	4.70	4.30	3.85	2.85
		MID.	6.00	6.00	5.50	5.00	4.10	2.90	2.15	1.50
		MIN.	4.10	3.05	2.40	1.90	1.50	1.00	0.65	0.35

11.90 m BOOM												
LOAD RADIUS(m)		3.5 and below	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10.0	11.47	
CRANE STRENGTH		4.10	4.10	4.10	3.90	3.50	3.20	3.00	2.80	2.60	2.30	
EMPTY CHASSIS	extension width of outriggers	MAX.	4.10	4.10	4.10	3.90	3.50	3.20	2.90	2.45	2.00	1.50
		MID.	4.10	4.10	4.10	3.90	2.90	2.15	1.55	1.25	1.00	0.75
		MIN.	3.05	2.40	1.90	1.50	1.00	0.65	0.35	0.25	0.15	-

15.20 m BOOM														
LOAD RADIUS(m)		4.0 and below	4.5	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	14.77
CRANE STRENGTH		4.00	3.80	3.60	3.30	3.00	2.80	2.60	2.40	2.20	2.00	1.85	1.75	1.65
EMPTY CHASSIS	extension width of outriggers	MAX.	4.00	3.80	3.60	3.30	3.00	2.80	2.45	2.00	1.65	1.30	1.15	1.00
		MID.	4.00	3.80	3.60	2.90	2.15	1.55	1.25	1.00	0.80	0.65	0.55	0.45

18.50 m BOOM																
LOAD RADIUS(m)		5.0 and below	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0	18.07	
CRANE STRENGTH		3.45	3.20	2.90	2.70	2.50	2.30	2.10	1.90	1.70	1.55	1.45	1.35	1.25	1.20	
EMPTY CHASSIS	extension width of outriggers	MAX.	3.45	3.20	2.90	2.70	2.45	2.00	1.65	1.30	1.15	1.05	0.95	0.85	0.75	0.70
		MID.	3.45	2.90	2.15	1.55	1.25	1.00	0.80	0.65	0.55	0.45	0.40	0.35	0.30	0.25

Table C

5.30 m BOOM										
LOAD RADIUS(m)		2.0 and below	2.5	3.0	3.5	4.0	4.5	4.87		
CRANE STRENGTH		15.00	12.00	10.00	8.75	7.50	6.60	6.10		
EMPTY CHASSIS	extension width of outriggers	MAX.	15.00	12.00	10.00	8.75	7.50	6.60	6.10	
		MID.	15.00	12.00	10.00	8.75	7.25	5.75	4.95	
		MIN.	10.60	6.75	4.80	3.65	2.90	2.30	1.95	

8.60 m BOOM											
LOAD RADIUS(m)		3.0 and below	3.5	4.0	4.5	5.0	6.0	7.0	8.17		
CRANE STRENGTH		6.00	6.00	5.50	5.00	4.70	4.30	4.00	3.55		
EMPTY CHASSIS	extension width of outriggers	MAX.	6.00	6.00	5.50	5.00	4.70	4.30	4.00	3.25	
		MID.	6.00	6.00	5.50	5.00	4.70	3.35	2.50	1.85	
		MIN.	4.70	3.55	2.80	2.25	1.85	1.25	0.85	0.55	

11.90 m BOOM												
LOAD RADIUS(m)		3.5 and below	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10.0	11.47	
CRANE STRENGTH		4.10	4.10	4.10	3.90	3.50	3.20	3.00	2.80	2.60	2.30	
EMPTY CHASSIS	extension width of outriggers	MAX.	4.10	4.10	4.10	3.90	3.50	3.20	3.00	2.80	2.35	1.80
		MID.	4.10	4.10	4.10	3.90	3.35	2.50	1.90	1.60	1.30	0.95
		MIN.	3.55	2.80	2.25	1.85	1.25	0.85	0.55	0.40	0.30	-

15.20 m BOOM															
LOAD RADIUS(m)		4.0 and below	4.5	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	14.77	
CRANE STRENGTH		4.00	3.80	3.60	3.30	3.00	2.80	2.60	2.40	2.20	2.00	1.85	1.75	1.65	
EMPTY CHASSIS	extension width of outriggers	MAX.	4.00	3.80	3.60	3.30	3.00	2.80	2.60	2.35	1.90	1.65	1.45	1.30	1.20
		MID.	4.00	3.80	3.60	3.30	2.50	1.90	1.60	1.30	1.00	0.85	0.75	0.65	0.60

18.50 m BOOM																
LOAD RADIUS(m)		5.0 and below	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0	18.07	
CRANE STRENGTH		3.45	3.20	2.90	2.70	2.50	2.30	2.10	1.90	1.70	1.55	1.45	1.35	1.25	1.20	
EMPTY CHASSIS	extension width of outriggers	MAX.	3.45	3.20	2.90	2.70	2.50	2.30	1.90	1.65	1.45	1.30	1.15	1.10	1.00	0.90
		MID.	3.45	3.20	2.50	1.90	1.60	1.30	1.00	0.85	0.75	0.65	0.55	0.50	0.45	0.40

- NOTE :
1. Rated capacity indicator issues warning with the limit warning lamp and the buzzer when the working state approaches the stability limit or the strength limit.
 2. When the AML is equipped with the rated capacity limiter, an operation stops automatically if the rated lifting capacity is exceeded.
 3. When the crane is front mounted, set up the front outriggers so that the front wheels are slightly in contact with the ground. (If tire deformation is large, AML may activate earlier.)
 4. When the crane is front mounted, set up the rear outriggers so that the vehicle body is raised slightly with the rear wheels sufficiently in contact with the ground.
 5. Empty Chassis Rated Capacities in these tables depend on condition that crane is set level on firm level ground.
 6. This value have been calculated on the basis of ISO 15442.
 7. This value includes the mass of lifting devices such as hook block (110 kg).
 8. This load radius shows actual load radius which includes boom deflection.
 9. Rated lifting capacity is in consideration of the loading on the truck bed, and is within the range from the empty chassis rated lifting capacity to the crane strength rated lifting capacity.
 10. If the boom length exceeds the table value even a little, the performance is limited to the performance of the next boom length.
 11. When the boom length is 15.20 m, a half of the \sphericalangle mark on lateral face of the 4th boom section is exposed out of 3rd boom section.
 12. If an operation that exceeds 6,000 kg is performed, change the number of parts of line. If an operation that exceeds 9,000 kg is performed, change the hook block also to the optional 15,000 kg hook block. For details, refer to the operation manual.

Number of part line	4	6	10
Maximum of load	6,000 kg	9,000 kg	15,000 kg

13. Empty chassis rated lifting capacity varies according to the working area.
 - Front mounting <over-side, over-rear area> : 100%
 - <over-front area> : 25% (*2) or 60% (*2) or 100% (*2)


*2 : Depend on the types of chassis.
14. Empty Chassis Rated Capacities table A, B, and C depend on the types of chassis.
(The following table shows guidelines for bodywork vehicles that can achieve the rated lifting capacity tables A, B, and C for vehicles with front 1-axis and rear 2-axis. Be sure to carry out a stability inspection to determine which performance to apply.)

A	5500 mm ≤ WB (*3), 25 t ≤ GVW, 3.0 t ≤ CAWf (*4), (Must be set up the rear outrigger.)
B	5500 mm ≤ WB (*3), 30 t ≤ GVW, 4.0 t ≤ CAWf (*4), (Must be set up the rear outrigger.)
C	5500 mm ≤ WB (*3), 30 t ≤ GVW, 5.0 t ≤ CAWf (*4), (Must be set up the rear outrigger.)


*3 : From the front axle to the farthest rear axle.

*4 : Chassis front axle weight (excluding crane and mounting parts mass).


Extension mark



Front mounting



WORKING RANGE (4 part line)

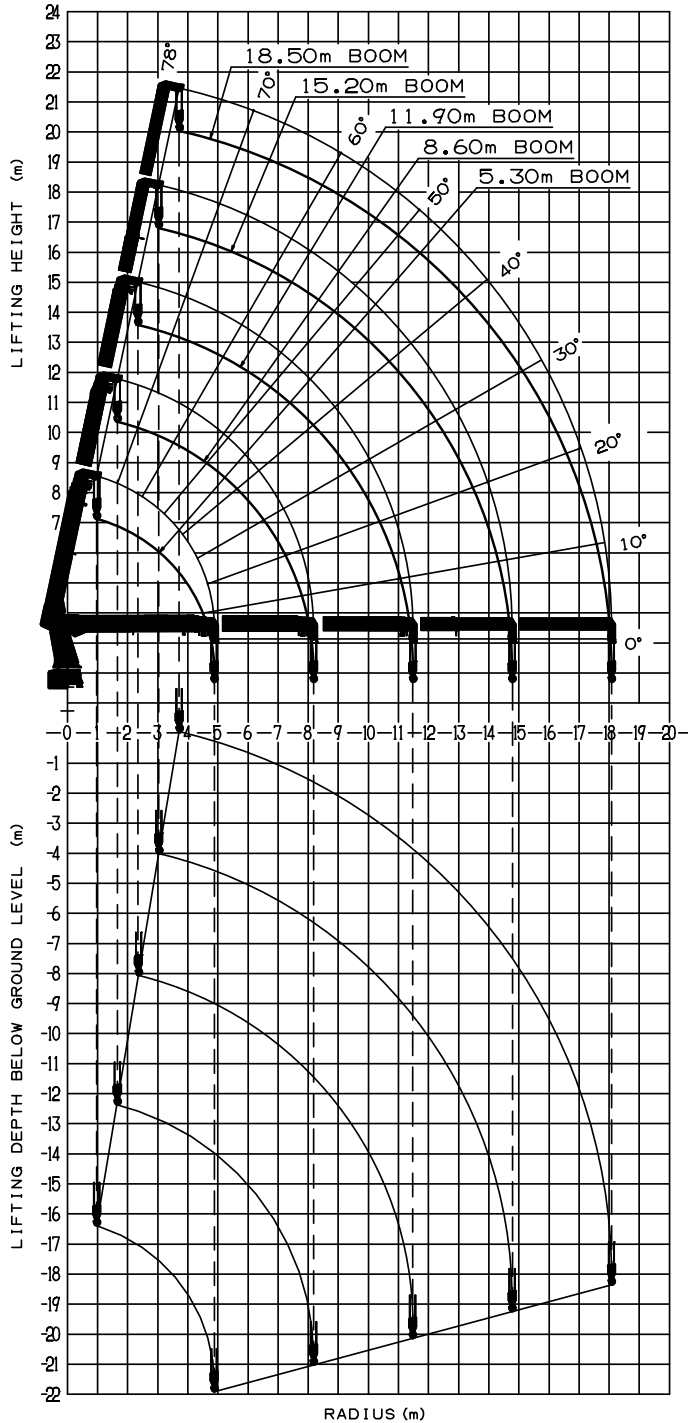

NOTE : The above lifting heights and boom angles are based on a straight (unladen) boom, and allowance should be made for boom deflection obtained under laden conditions.

Table A

WORKING RANGE (BASKET MODE)

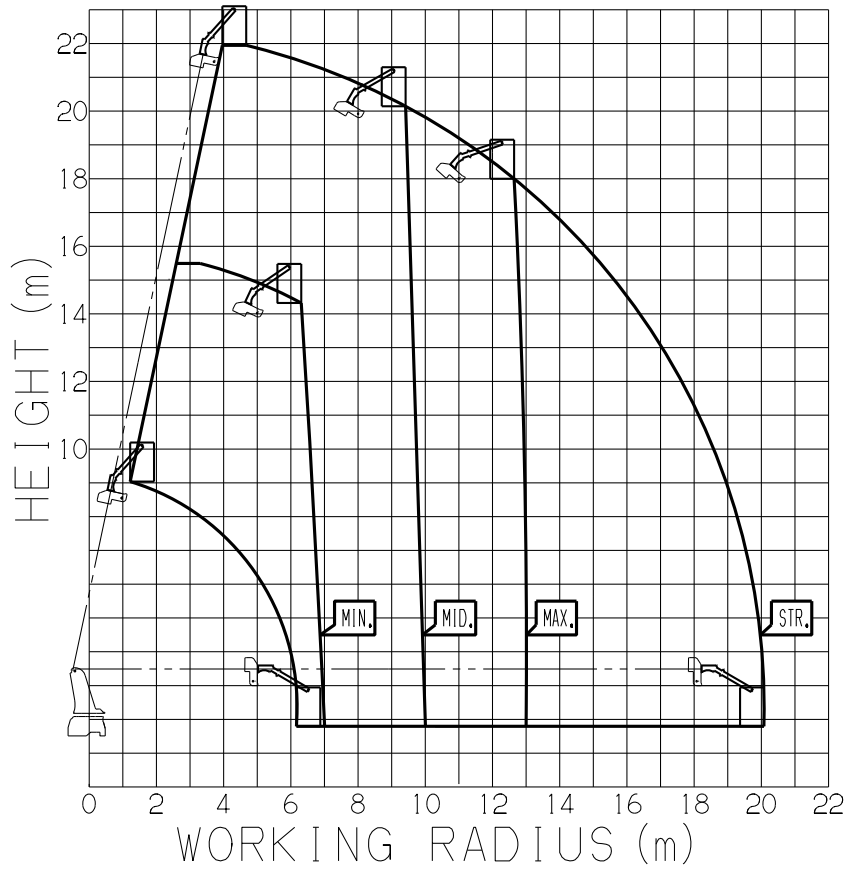


Table B



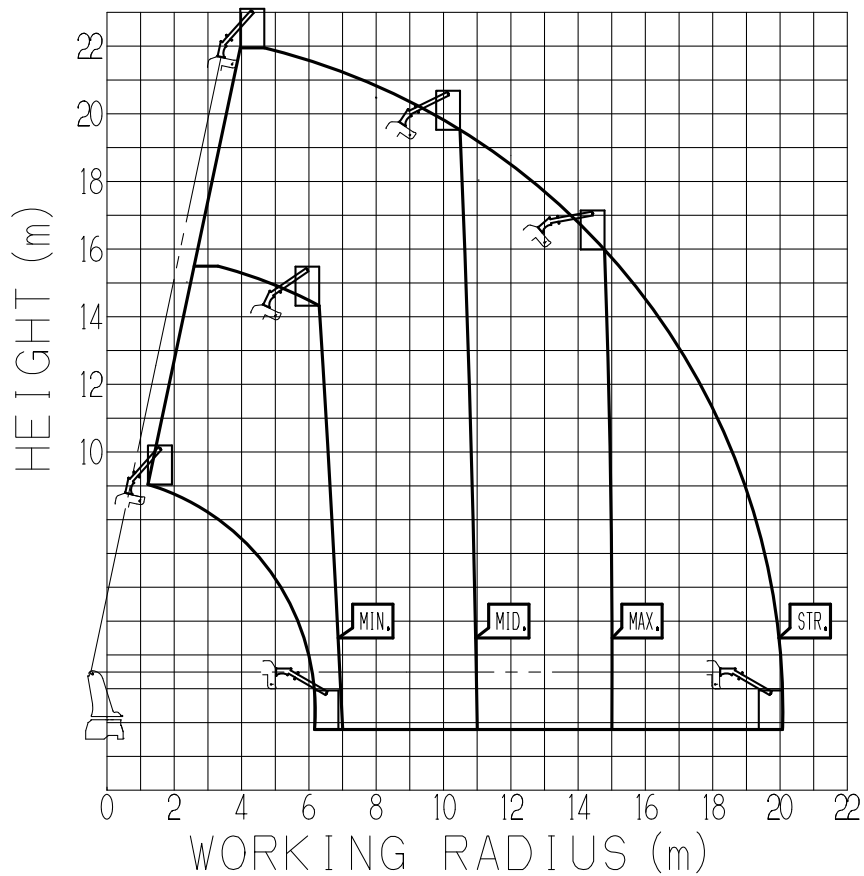


Table C

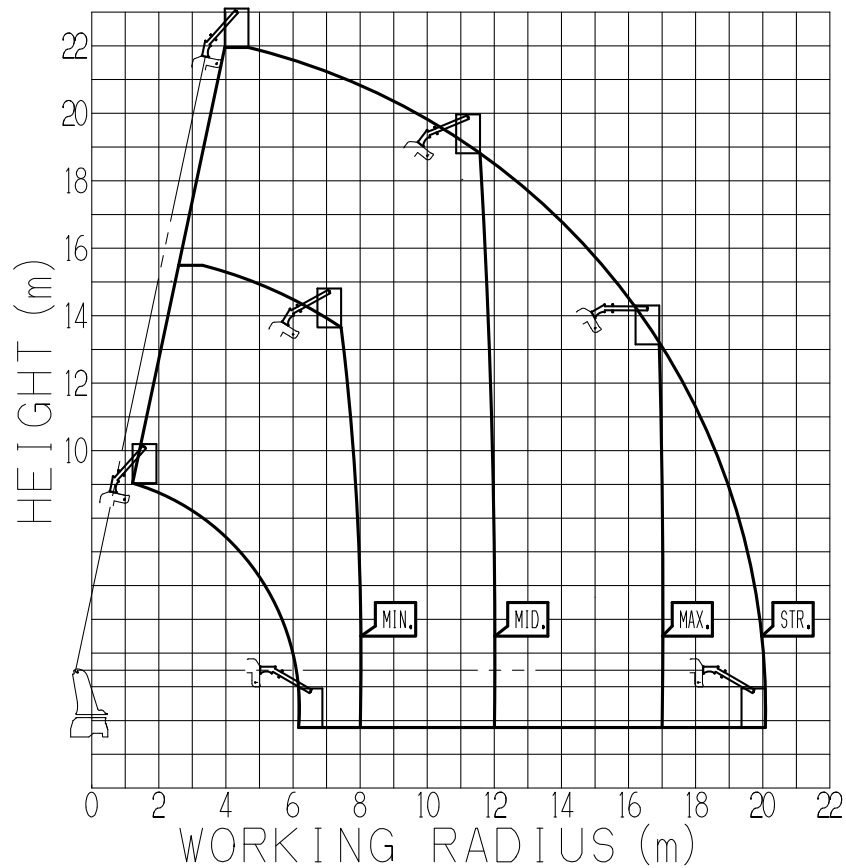


- NOTE : 1. The indicated working range assumes that the machine is set up on a firm and level ground, and does not include boom deflection.
2. This working range chart shows the over-side and over-rear areas.
(The working range is up to "STR." when the stability is maximum. When the stability is minimum, the working range is in accordance with the outrigger extension width during work.)
3. The working range in the over-front area is smaller than the indication in the working range chart.
4. "MAX.", "MID.", and "MIN." indicates the outrigger extension widths.
5. This working range chart is an example, and the actual work range varies depending on the shape of the basket.

DIMENSIONS

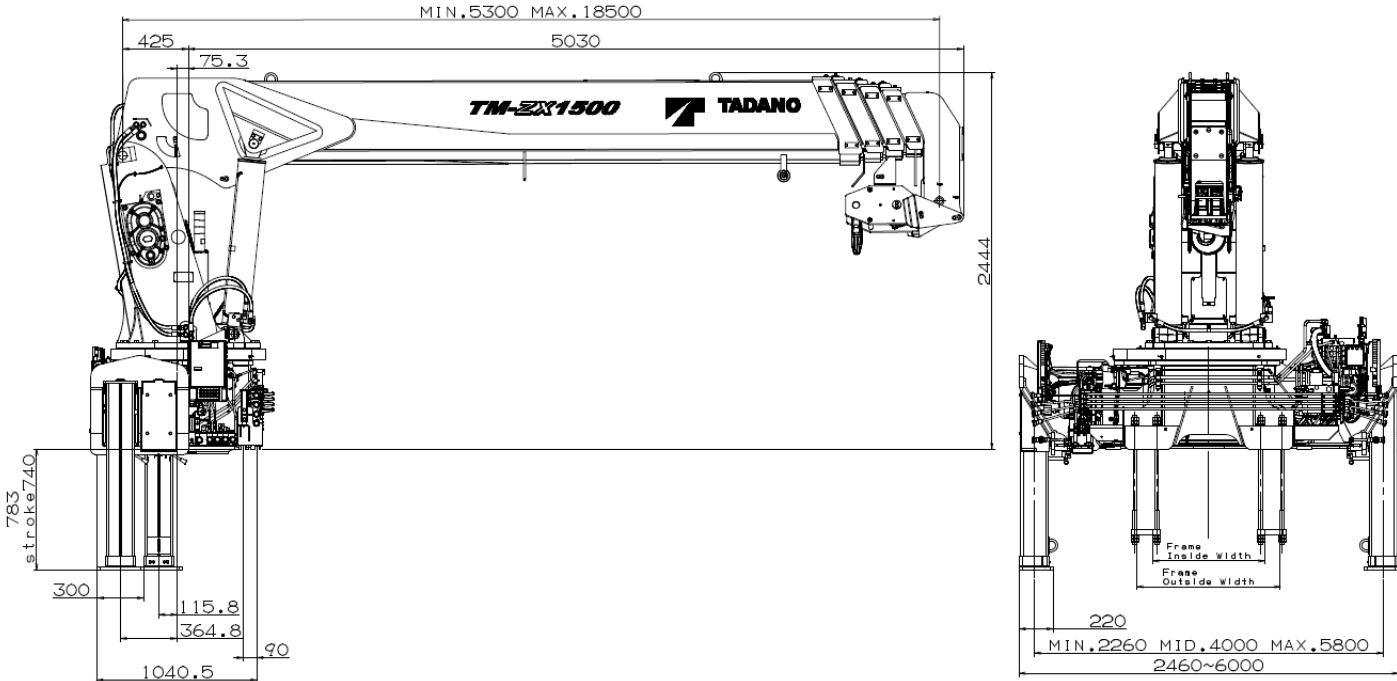


REAR OUTRIGGER

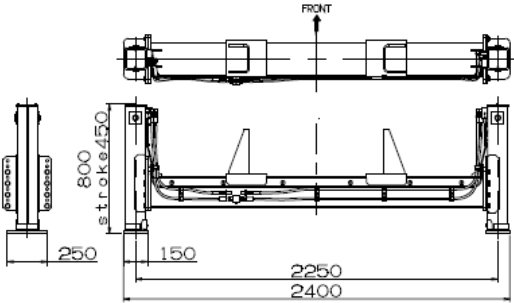

MOUNTABLE BASKET SPECIFICATIONS


Max. basket weight	200 kg
Max. basket loading capacity	200 kg
Max. basket arm length	1700 mm

- The size of mounting bolt is M16x2.0, and the length should be selected so that the engagement allowance is 13mm or more and 24mm less.
- Use bolts with a strength classification of 10.9 or equivalent and washers suitable for the bolts.
- Tightening torque : 147 ± 8 [N · m]

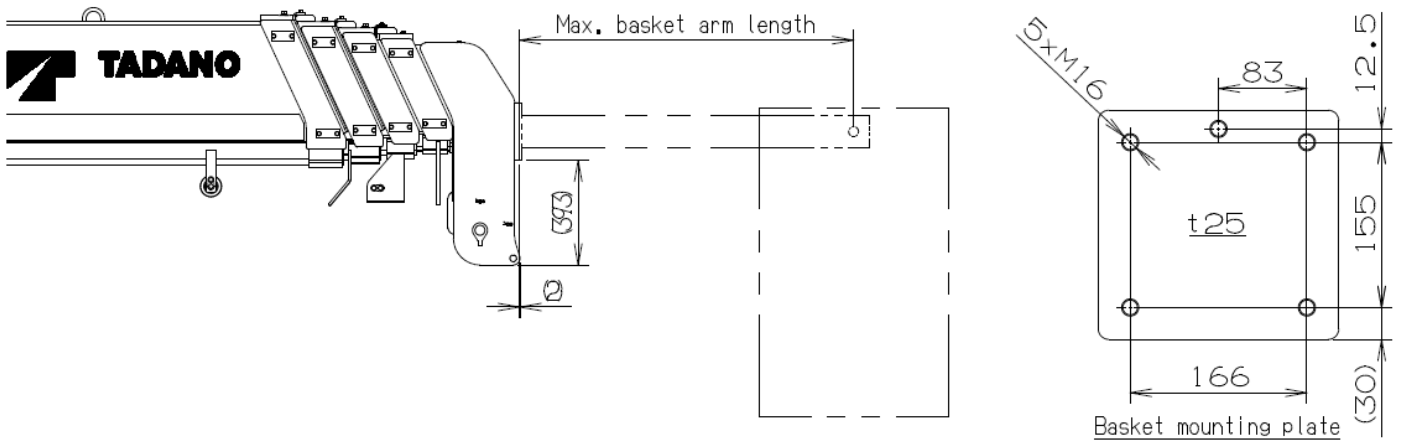

MOUNTABLE BASKET SPECIFICATIONS (WHEN USING OPTIONAL BASKET MOUNTING SUPPORT)

Max. basket weight	200 kg
Max. basket loading capacity	200 kg
Max. basket arm length	1500 mm

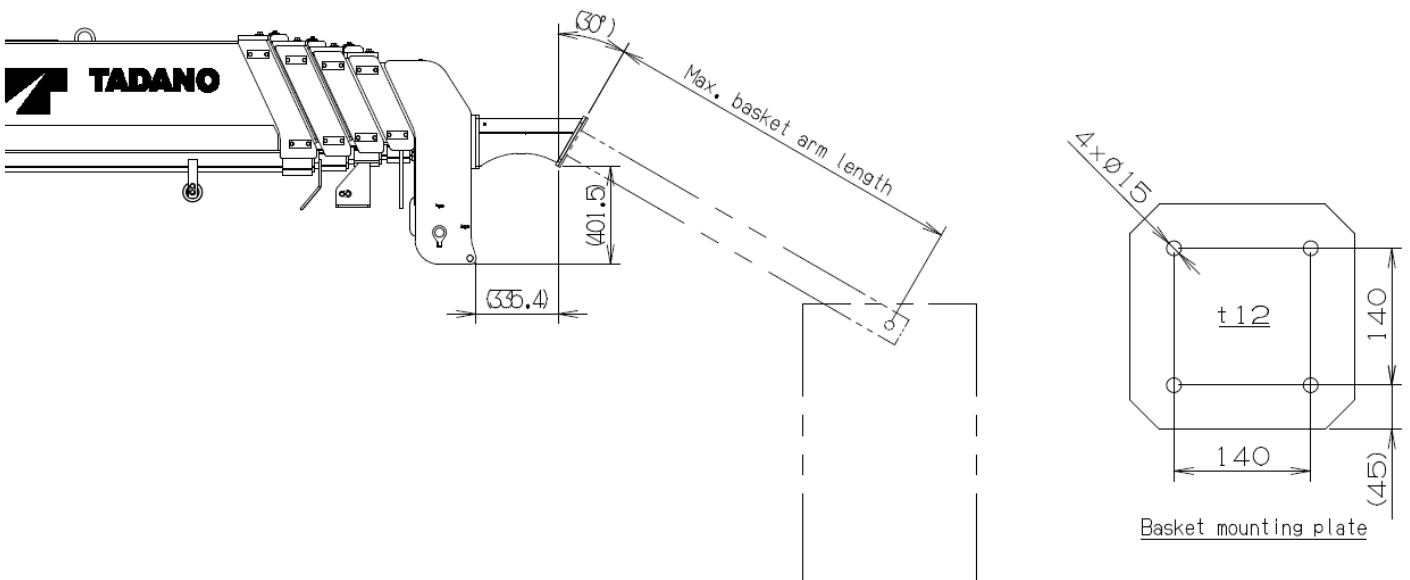

GENERAL DATA FOR SUITABLE TRUCKS

Gross vehicle weight	25,000 kg min.
Chassis front axle weight (excluding crane and mounting parts mass)	3,000 kg min.
Wheel base (*1)	5,500 mm min.
P.T.O. torque	255 N·m {26 kgf·m} min.
P.T.O. revolution range of use (min. to max.)	Approx. 350 to 1,500 min ⁻¹ {rpm}
Width for crane mounting	Approx. 1,350 mm min.
Frame	Weight distribution and frame strength should be calculated for each truck
Frame width range (inside to outside)	Approx. 520 to 1,010 mm
Frame height (ground to chassis frame top) (*2)	Approx. 840 to 1,195 mm
Chassis frame section modulus (*3)	585 cm ³ min.

*1 From the front axle to the farthest rear axle.

*2 Height of crane mounting surface is changed by crane bases.

*3 The chassis frame material must meet the following conditions at the crane mounting location.

—Yield point : 392 N/mm²

—Tensile strength : 540 N/mm²

